

Sunpro **Max** Series

N-type High Efficiency Bifacial Module

Module efficiency

23.34%

Power Output

700-725W

· Silver frame, White mesh



Lower levelized cost of energy



Superior high-temperature stability




Enhanced low-irradiance performance



Excellent bifacial power gain performance

Linear power output warranty for 30 years

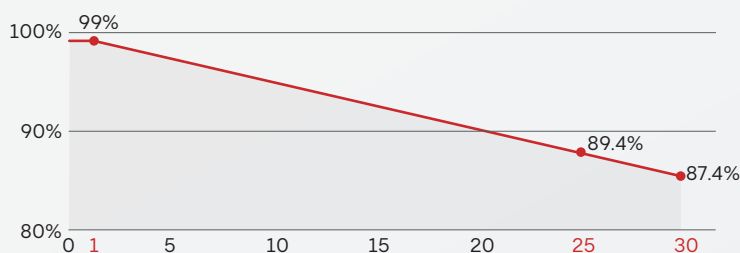

WARRANTY

Extended warranty available upon request at additional cost

Quality Guarantee **15 years**

Power Warranty **30 years**

CERTIFICATE



ELECTRICAL CHARACTERISTICS

SPDG (700/725W)-N132M12

Model of modules	SPDG700-N132M12		SPDG705-N132M12		SPDG710-N132M12		SPDG715-N132M12		SPDG720-N132M12		SPDG725-N132M12	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Power (Pmax/W)	700.00	529.50	705.00	533.80	710.00	537.90	715.00	541.90	720.00	546.00	725.00	549.90
Maximum power voltage (Vmp)	40.51	38.00	40.69	38.20	40.88	38.40	41.07	38.60	41.27	38.80	41.46	39.00
Maximum power current (Imp)	17.28	13.94	17.33	13.98	17.37	14.01	17.41	14.04	17.45	14.07	17.49	14.11
Open circuit voltage (Voc)	48.27	45.80	48.46	46.00	48.65	46.20	48.84	46.40	49.03	46.60	49.23	46.80
Short circuit current (Isc)	18.32	14.74	18.36	14.77	18.40	14.80	18.44	14.83	18.48	14.86	18.52	14.90
Module efficiency	22.53%		22.70%		22.86%		23.02%		23.18%		23.34%	

STC (Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature25°C)

NMOT (Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s)

ELECTRICAL CHARACTERISTICS WITH 15% REAR SIDE POWER GAIN

Front power Pmax/W	805.00	810.75	816.50	822.25	828.00	833.75
Maximum power voltage (Vmp)	40.51	40.69	40.88	41.07	41.27	41.46
Maximum power current (Imp)	19.87	19.93	19.97	20.02	20.06	20.11
Open circuit voltage (Voc)	48.27	48.46	48.65	48.84	49.03	49.23
Short circuit current (Isc)	21.07	21.11	21.16	21.21	21.25	21.30

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	2384x1303x33mm(93.86x51.30x1.30in)
Weight	37.5kg(82.67lb)
Cell	132cells (Half-Cell), Mono-Crystalline, N-type Bifacial, 210x105mm(8.27x4.13in)
Front glass	2.0mm ultra clear embossed double layer colorless glass
Back glass	2.0mm white mesh glazed tempered glass
Frame	Anodized aluminum alloy
Junction box	IP68
Output wire	4mm ²
Wire length	symmetrical lengths 1300mm(51.18in)
Connector	Stäubli MC4
Packing Specification	33 pcs/Pallet; 594 pcs/40' HQ


OPERATING PARAMETERS

Power tolerance	0~+5W
Maximum system voltage	1500V
Maximum rated fuse current	35A
Operating temperature range	-40~+85°C
Mechanical load capacity	+5400Pa/-2400Pa


TEMPERATURE CHARACTERISTICS

Temp. Coefficient of Isc(TK Isc)	0.045% / °C
Temp. Coefficient of Voc (TK Voc)	-0.25% / °C
Temp. Coefficient of Pmax (TK Pmax)	-0.30% / °C
Operating temperature range	45±2°C

MODULE DIMENSIONS(MM)

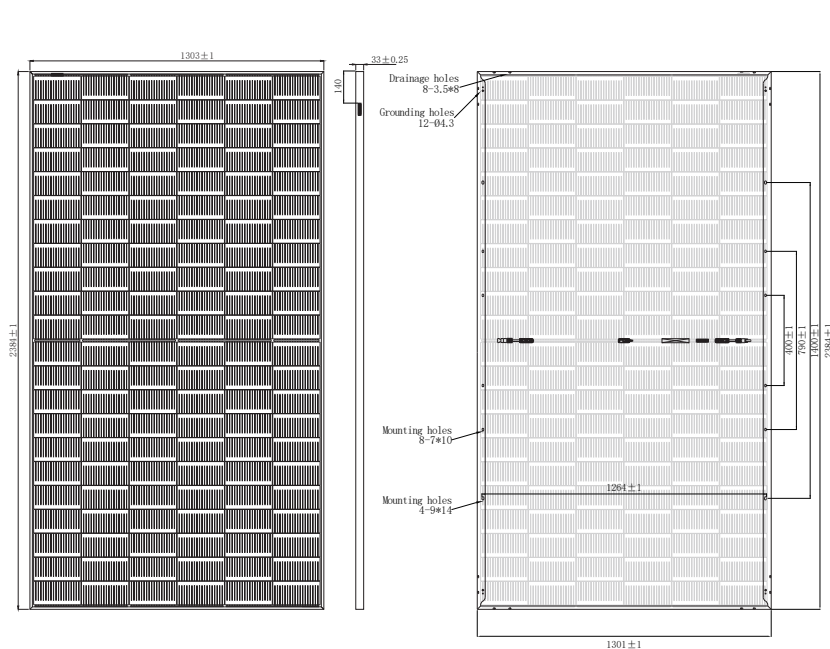

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

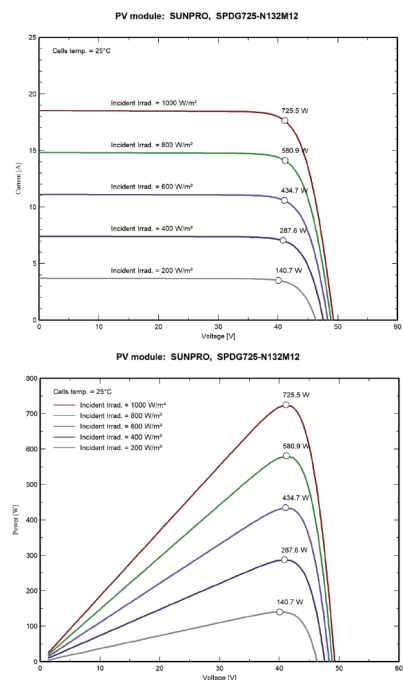

SUNPRO POWER LLC

ADD: 3050 BUSINESS PARK DRIVE STE E, NORCROSS, GA, 30071, USA

E-MAIL: info@sunpropower.com WEBSITE: www.sunpropower.us

*All data are subject to slight deviations and are for reference only. Sunpro reserves the right of final interpretation.